

YHS36 Datasheet

Wideband Headset for Yealink IP Phone

Yealink YHS36 is the over-the-head style headset that is made for office workers, SOHO, or call center staff. It supports QD (Quick Disconnect) feature, and it is compliant with the full range of Yealink enterprise IP phones. The Yealink YHS36, available in monaural (YHS36 Mono) and binaural (YHS36 Dual), is a professional analog wired headset to facilitate conversations in ways that your concentration zone and focus are easily got in and the listening fatigue is reduced as well. Its ergonomic design and soft leather ear cushions make YHS36 comfortable enough for long all-day use.



Key Features

Perfectly compatible with Yealink Phones

Runs right out of the box, a USB (USB-A/USB-C) plug-and-play setup makes the connectivity to Yealink IP phones, PC and tablet in touch, and the connectivity via 3.5 mm jack to PC and smartphone is ready to work likewise.

Noise-Canceling Microphone



The noise-canceling microphone allows for the most reduction of outside noise so that the listeners can focus more on the desired sound at hand. The nearby talkers are protected with most call privacy as well.

Unparallel Audio Experience

Made for calls and music, this headset is kitted out with wideband HD audio technology and passive noise cancellation that ensures a richer and clearer conversation and eliminates background noises as well.

All-day-ease

The over-the-head style, ultra-lightweight materials, and bio-mimetic protein-based leather ear cushions are easy on your head and ears. Its ergonomic design makes YHS36 comfortable enough for long conference calls and all-day use.

Specification



| Specifi cations | Introduction | |
|-----------------------------|---|--|
| Main Feature s | Plug-and-play RJ9 connectivity to Yealink IP Phones, including T19 § E2/T21 § E2/T23P/T23G/T27G/T29G/T30/T30P/T31/T31P/T31G/T33P/T33G/T 40P/T40G/T41S/ T42S/T46S/T48S/T42U/T43U/T46U/T48U/T53/T53W/T54W/T57W/T58A/VP59/T41S SFB/T42S SFB/T46S SFB/T48S SFB/T55A SFB/T56A SFB/T58A/SFB/MP56 HD Voice/Wideband speaker performance Noise-canceling microphone and passive noise cancellation ActiveProtection technology safeguards users from acoustic injury 330° bendable boom arm for easy adjustment without breaking | |
| General | Headset cable length: 0.9 m QD to RJ9 cable length: 1.2 m Color: Black and silver Weight: YHS36 Mono: 124g/YHS36 Dual: 170g Operating temperature: -10 °C to - 50 °C | |
| Microp hone | Microphone frequency response range: 100 Hz-7 kHz Microphone bandwidth: Wideband Microphone Sensitivity: -44.0 dB re. 1 V/Pa | |
| Speake r | Speaker sensitivity: 93 dB SPL @ 1 kHz, 60 mV Speaker Frequency response range: 20 Hz-20 kHz Speaker impedance: 32+/-4.8Ω, @ 1.0 kHz Speaker input power: normal 5 mW, max 10 mW Speaker bandwidth: Wideband | |
| Packag e Feature s | Package content: YHS36 Mono Headset or YHS36 Dual Headset QD to RJ9 cable Quick Start Guide Qty/CTN: 20 PCS N.W/CTN: YHS36 Mono: 2.48kg/YHS36 Dual: 3.41kg G.W/CTN: YHS36 Mono: 3.26kg/YHS36 Dual: 4.19kg Giftbox size: 170 mm x 195 mm x 60 mm Carton Meas: 345 mm x 310 mm x 400 mm | |




Product Type

| Product Type | SKU | Model Name |
|--------------|--------------|---|
| | 1308022 | YHS34 Mono |
| | 1308023 | YHS34 Dual |
| | 1308028 | YHS34 Lite Mono |
| Products | 1308029 | YHS34 Lite Dual |
| Products | 1308089 | YHS34 Mono for 3rd Party |
| | 1308090 | YHS34 Dual for 3rd Party |
| | 1308091 | YHS34 Lite Mono for 3rd Party |
| | 1308092 | YHS34 Lite Dual for 3rd Party |
| | 330000008028 | QD to RJ9 Cord |
| | 330000008063 | QD to RJ9 Cord for 3rd Party |
| | 1308076 | YHM341 |
| | 1308077 | YHD342 |
| Accessories | 1308078 | YHM341 Lite |
| Accessories | 1308079 | YHD342 Lite |
| | 330100010021 | Foamy Ear Cushion for UH34/YHS34 (1 PCS) |
| | 330100010022 | Leather Ear Cushion for UH34/YHS34 (1 PCS) |
| | 330100010023 | Foamy Ear Cushion for UH34/YHS34 (12 PCS) |
| | 330100010024 | Leather Ear Cushion for UH34/YHS34 (12 PCS) |
| | | |

Connection



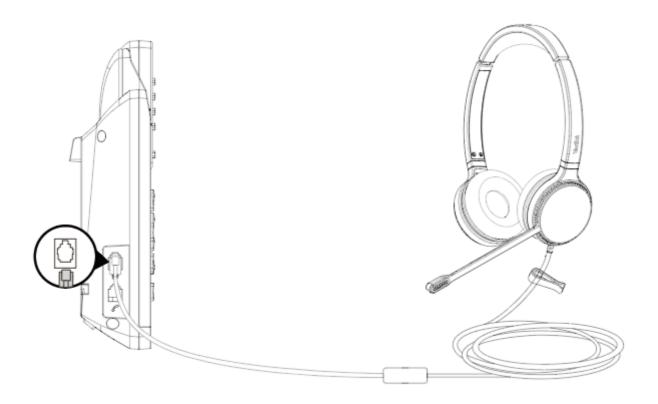

For more information, please go to the Yealink official website.