


Access Your Voice Mail Router Greeting

- 1. Dial 612-767- POPP (7677) or dial [*15] Not available with all line types
- 2. When prompted, enter your voice mail box number (typically, your main number)
- 3. Enter mail box ID [0] for the router greeting
- 4. When prompted, enter your password (default is 1234), then [#]

Access a Voice Mail Box on Your Router

- 1. Dial 612-767- POPP (7677) or dial [*15] Not available with all line types
- 2. When prompted, enter your voice mail box number (typically, your main number)
- 3. Enter your mail box ID [1-9]
- 4. When prompted, enter your password (default is 1234), then press [#]

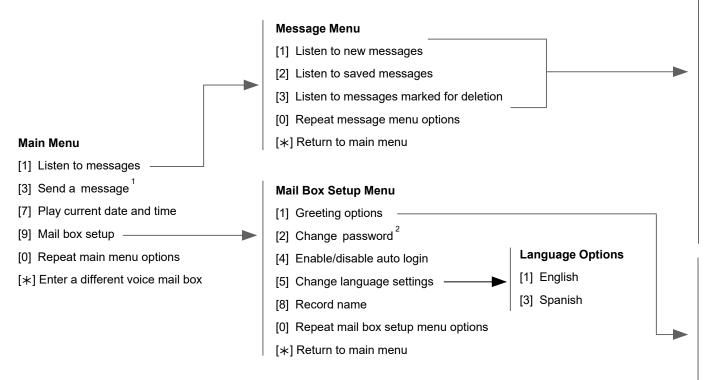

Feature works only when forwarding a voice mail message to another voice mail box on POPP's AP voice mail system.

Listen to Message Options

- [1] Start current message over
- [2] Save message and go to next message
- [3] Delete message and go to next message
- [4] Save message as new and go to next message
- [5] Return call (when Caller ID is provided)
- [6] Forward message
- [7] Rewind message 3 seconds
- [8] Pause/resume
- [9] Fast forward message 3 seconds
- [0] Repeat listen to message options
- [*] Return to main menu
- [#] Time and phone number of message

Greeting Options

- [1] Play current greeting
- [2] Re-record greeting
- [3] Delete current greeting
- [0] Repeat greeting options
- [*] Return to setup menu

If [#] is entered without entering a new password—and confirmed by pressing [#] again, you will not be prompted to enter a password when calling voice mail. POPP does not recommend this, as any caller can access your voice mail by entering [*] during your greeting. A better option is to enable the auto login feature, which allows you to enter voice mail without being prompted for a password when calling from the phone line assigned to your voice mail box.